## **PRODUCT SHEET: WALL-T**

**Resilient Wall Batten** 

WALL-T is a Resilient Wall Batten used to isolate a dry wall construction from an adjacent support.

## **SYSTEM FEATURES:**


- Cost effective
- Quick and easy to install
- Standard thicknesses are 56mm and 96mm
- Other thicknesses available to order
- A resilient strip should be installed to support the base of the wall and to decouple the perimeter of the wall.



## **REQUIREMENTS:**

To specify which WALL-T wall batten you require, our engineers will need to know:

- The required performance level this will determine the type of WALL-T
- The height and weight of the supported wall this will determine the supply of the base isolation strip
- Details of any items supported off the walls such as televisions etc.
- The supporting wall for us to recommend which fixings would be best to use

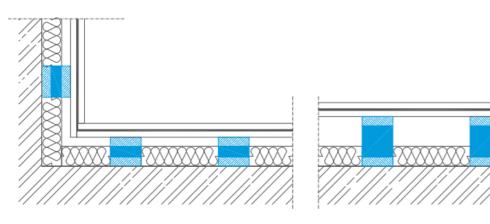



Starrenhoflaan 43-A04 +32 3 309 14 22 2950 Kapellen Belgium

info@doxgroup.be www.doxgroup.be KBC BE46 4085 0488 2136 BvB BE91 6455 1831 3976 - BIC JVBABE22 BTW BE 0417.972.703 TVA — RPR Antwerpen RPM